

Table of Contents

KEY CONTACT INFORMATION	2
EXECUTIVE SUMMARY	3
SCOPE AND APPROACH	7
Scope of work	8
Ratings, Methods and Scoring	9
Cost Estimating	12
CONDITION ASSESSMENT	14
Systems Description - Wellington Middle/High School	15
Priorities	16
3-, 5-, 10-Year Plans	19
APPENDICES	24
Appendix A: 3-Year Plan Assets List	Α
Appendix B: 5-Year Plan Assets List	В
Appendix C: 10-Year Plan Assets List	С

Contacts

Key Contact Information

McKinstry Contacts

Devin Boyce

Program Manager, Facility Condition Assessments 720.408.4573

devinb@mckinstry.com

Roger Noonan

Senior Facility Assessment Consultant

970.531.1527

rogern@mckinstry.com

Josh Phillips

Facility Assessment Consultant

719.480.1372

joshph@mckinstry.com

Tracey Cousins

Strategic Account Manager

720.445.7608

traceyc@mckinstry.com

Jaime Villarino-Eilenberger

Project Manager - Technical Services

949.933.7996

jaimev@mckinstry.com

Poudre School District Contacts

Trudy Trimbath

Energy and Sustainability Manager

970.490.3502


ttrimbath@psdschools.org

Jessie Ericson

Administrative Assistant - Operations

970.490.3080

jericson@psdschools.org

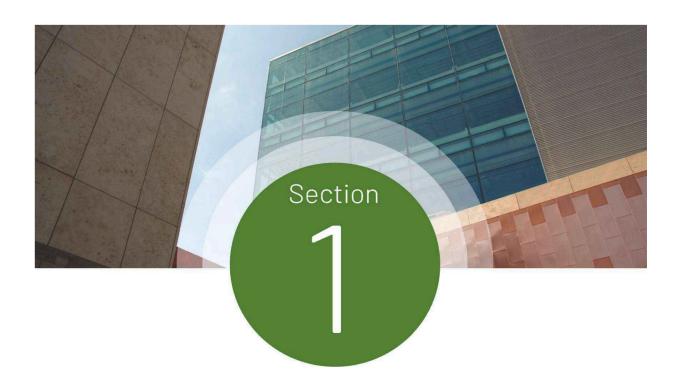



Project Goals

The contents of this report present the results of the Facility Condition Assessment (FCA) performed at Wellington Middle/High School within the Poudre School District (PSD) on May 3, 2023. PSD intends to utilize the findings of this report to inform both capital and operating budgets, prioritize maintenance efforts, and optimize planning processes as replacements and upgrades of assets and facility systems become necessary in the future.

Facility List

The scope of the FCA project included the assessment of the following campus.

FACILITY NAME	AREA (SF)	YEAR(S) BUILT
WELLINGTON MIDDLE/HIGH SCHOOL	251,541	2022
TOTAL	251,541	

Facility Summary

Wellington Middle/High School

Wellington Middle/High School is located at 2856 Clevland Ave., Wellington, CO 80549. This 251,541 SF facility consists of two levels and was initially constructed in 2022. The equity index for this school is 1.04.



Wellington Middle/High School


Assessment Summary

This section summarizes the building systems at the facility and describes the general condition observed based on the assessment performed on May 3, 2023. Additional details, findings and recommendations are presented in Section 3 of this report.

Capital Plan Summary

The estimated replacement costs for equipment expected to fail within the next ten years are shown below, divided into three separate plans. These plans are the 3-Year Plan, 5-Year Plan, and the 10-Year Plan. Each plan includes the cost for replacement of equipment expected to fail during these periods, based on the observed condition of the equipment at the time of the assessment.

Replacement costs include 3% inflation year over year.

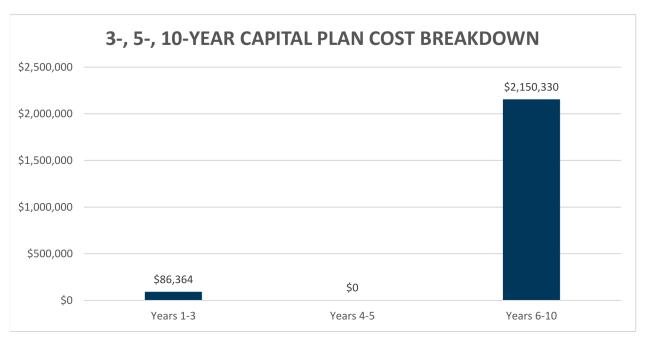


3-, 5-, 10-Year Capital Plan Cost Breakdown

Annual Capital Expenditure (20 Years)

20-Year Annual Capital Needs and 20-Year Annual Capital Expenditure by Subsystem below indicate the estimated replacement costs for equipment expected to fail within the next twenty years, and are displayed both by year and by subsystem.

Replacement costs include 3% inflation year over year.

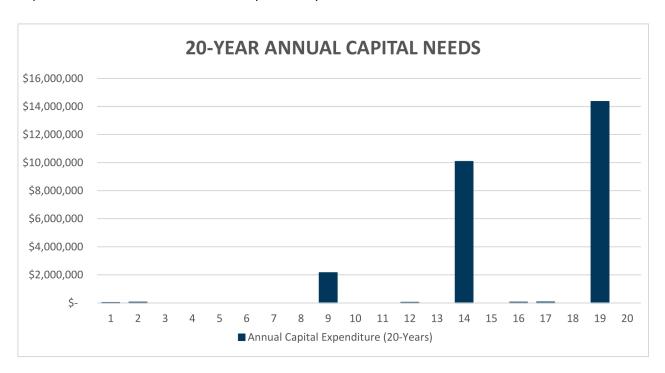


Annual Capital Expenditure by Year

Replacement costs associated with the Annual Capital Expenditure graph and table include values that are adjusted for inflation.

20-Year Annual Capital Expenditure by Subsystem

Subsystem	Years 1-5	Years 6-10	Years 11-15	Years 15-20
B20 - Enclosure	\$0	\$0	\$0	\$0
B30 - Roofing	\$0	\$0	\$0	\$124,576
C10 - Int. Construction	\$0	\$0	\$0	\$0
C20 - Stairs	\$0	\$0	\$0	\$0
C30 - Interior Finishes	\$0	\$796,241	\$1,933,765	\$3,530,080
D10 - Conveying	\$0	\$0	\$0	\$0
D20 - Plumbing	\$60,985	\$114,617	\$41,748	\$367,063
D30 - HVAC	\$0	\$25,437	\$3,863,565	\$1,733,075
D40 - Fire Suppression	\$25,379	\$0	\$0	\$11,168
D50 - Electrical	\$0	\$1,214,034	\$4,284,990	\$8,654,370
E10 - Equipment	\$0	\$0	\$0	\$41,063
Total:	\$86,364	\$1,354,089	\$8,190,304	\$10,806,739

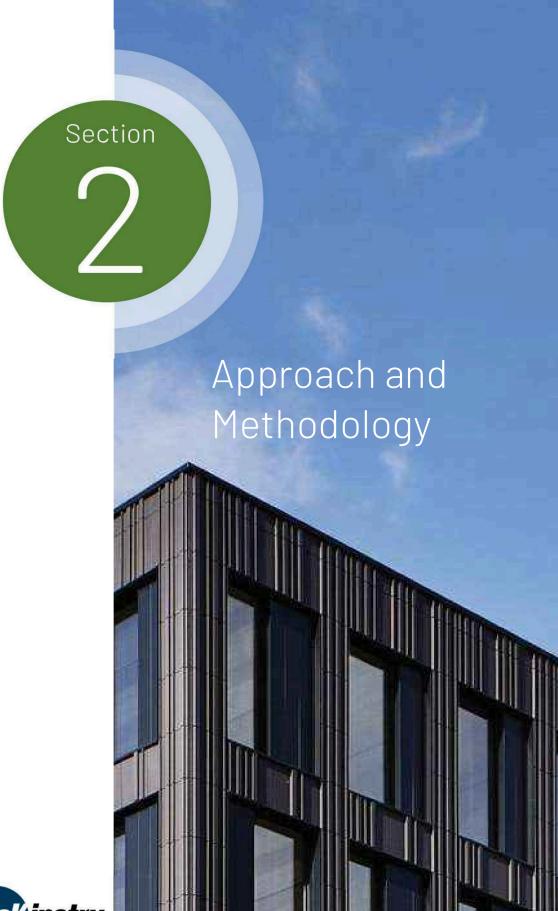



Scope and Approach

SCOPE OF WORK

The scope of this facility condition assessment includes all major mechanical, electrical, and plumbing equipment, and commercial refrigeration equipment. In addition, the building enclosure, roofing, interior construction and finishes, and fire suppression systems are included within the assessment. Turf, site assets, kitchen assets besides walk-in freezers, exhaust fans and kitchen make up air units are not included in scope.

The following table lists the general asset types included within the scope of this assessment. Also shown is the corresponding Uniformat code, which has been used to catalog equipment based on type and intended use.

UniFormat Classification of Building Systems

UNIFORMAT CODE	CATEGORY DESCRIPTION
B20	Exterior Enclosure (i.e. windows, walls, doors)
B30	Roofing (i.e. roofing covering, skylights, etc.)
C10	Interior Construction (i.e. doors, walls)
C20	Interior Stairs (i.e. stair construction)
C30	Interior Finishes (i.e. flooring, ceiling finishes, etc.)
D10	Conveying (i.e., elevators)
D20	Plumbing (i.e., water heating, pumps, compressors)
D30	Heating, Ventilation, and Air Conditioning
D40	Fire Suppression Systems
D50	Electrical (panelboards, transformers, switchgear)
E10	Equipment, Kitchen Hoods, Walk-in Units, etc.

RATINGS, METHODS AND SCORING

To allow Poudre School District more flexibility in prioritizing capital planning efforts, McKinstry has developed the following metrics which assign various scores to each asset.

Asset Condition

Condition ratings are presented for each asset as a score of 1-5. Scores are based upon a visual inspection during the building evaluation period. A score of 1 signifies that the asset is in great, "like new" condition. A score of 2 indicates that the asset is in good condition. A score of 3 signifies that the asset is in expected "average" condition based on function and the age of the asset. A score of 4 signifies that the asset is in poor condition, in need of repair, and will require replacement in the near future. A score of 5 signifies that the asset is in very poor or failed condition and in need of imminent replacement.

SCORE	CONDITION ASSESSMENT			
1	Asset is in great condition, no action required.			
2	Asset is in good condition, regular maintenance expected.			
3	Asset is in expected condition, regular replacement/maintenance expected.			
4	Asset is in poor condition, maintenance/replacement recommended soon.			
5	Asset is in very poor condition, urgent replacement needed.			

Student/Teacher Impact

Student/Teacher Impact scores are presented for each asset on a scale of 1-5 (low to high impact). This metric considers educational (student and/or teacher) impact caused if the equipment were to fail. Assets serving classrooms and other educational spaces are assigned scores of 2-5 depending on the impact the failure of an asset would have and if backups are available. A student/teacher impact score of 1 indicates that there is little to no impact to educational activities.

SCORE	STUDENT/TEACHER IMPACT			
1	Failure poses no significant educational impact.			
2	Failure poses low educational impact.			
3	Failure poses moderate impact. Asset serves teaching area, but has backup.			
4 Failure poses high educational impact.				
5	Failure poses severe impact. Asset serves teaching area and has no backup.			

Energy Cost Impact

The Energy Impact score is presented for each asset on a scale of 1-5 (low to high impact). Each of the asset types within the scope of this assessment were evaluated based on their impact to energy cost and consumption (including electrical, natural gas, and liquid fuels). Assets with a higher Energy Cost Impact score indicate that the asset has a large contribution to the overall energy costs of the facility. A sample of Energy impact scores is shown below:

Air Handling Unit less than 10,000 CFM 3 3	ASSET TYPE	ASSET SIZE	ENERGY Cost impact
Less than 10,000 CFM 3 5	ASSELLITE	ASSET SIZE	
Air Handling Unit between 10,000 CFM — 50,000 CFM		less than 10,000 CFM	
See than 200 tons 3 3 3 3 3 3 3 3 3	Air Handling Unit	· ·	<u> </u>
Less than 200 tons	7 th Harlaning Office		· · · · · · · · · · · · · · · · · · ·
Chiller between 200 – 500 tons 4 greater than 500 tons 5 Computer Room AC Condensing Unit Heat Pump less than 10 tons 2 Cooling Tower greater than 10 tons of rejection 2 greater than 200 tons of rejection 3 Jess than 5 HP 2 Dust Collector between 5 HP and 25 HP 3 greater than 25 HP 4 Exhaust Fan less than 5000 CFM 2 greater than 3000 CFM 2 greater than 5000 CFM 2 less than 200 MBH 2 between 200 – 1000 MBH 3 between 100 – 2000 MBH 4 greater than 2000 MBH 5 less than 100 MBH 2 between 100 and 500 MBH 3 greater than 500 KW 2 greater than 500 KW 2 greater than 500 KW 2 LED 2 Lighting, Exterior Fluorescent 4 HID/Incandescent 4 LED 2 Lighting, Int			
greater than 500 tons 5	Chiller		-
Less than 10 tons 2 2 2 3 3 3 3 3 3 3	Crimer		
Condensing Unit Heat Pump greater than 10 tons 3 3 3 3 3 3 3 3 3			
Lighting, Exterior Lighting, Exterior Lighting, Interior Lighting, Extern 1, 20,000 CFM Lighting, Interior Lighting, Interi	Condensing Unit		
Property Cooling Tower Freater than 200 tons of rejection 3		loss than 200 tons of rejection	2
Less than 5 HP	Cooling Tower		
Dust Collector Detween 5 HP and 25 HP 3 greater than 25 HP 4 4 4 4 4 5 6 6 6 6 6 6 6 6 6			
Breater than 25 HP	Dust Collector		
Lighting, Exterior Eless than 5000 CFM 2 2 2 2 2 2 2 2 2	Dust Collector		
Exhaust Fan greater than 5000 CFM 3			
Fan Coil Unit greater than 3000 CFM 2	Exhaust Fan		
Less than 200 MBH 2	Fan Cail Unit		
Fuel Fired Boiler between 200 – 1000 MBH 3 between 1000 – 2000 MBH 4 greater than 2000 MBH 5 less than 100 MBH 2 between 100 and 500 MBH 3 greater than 500 KW 2 greater than 500 KW 3 LED 2 Fluorescent 3 HID/Incandescent 4 LED 2 Lighting, Interior Fluorescent 4 HID/Incandescent 5 less than 5,000 CFM 3 between 5,000 and 25,000 CFM 4 greater than 25,000 CFM 5 less than 25 HP 2 between 25 - 150 HP* 3 greater than 150 HP* 4 Return Fan less than 20 HP 2	Fan Coll Unit		
Fuel Fired Boiler between 1000 – 2000 MBH 4 greater than 2000 MBH 5 Iess than 100 MBH 2 between 100 and 500 MBH 3 greater than 500 MBH 4 Generator Iess than 500 KW 2 greater than 500 KW 3 LED 2 Fluorescent 3 HID/Incandescent 4 LED 2 Lighting, Interior Fluorescent 4 HID/Incandescent 5 Iess than 5,000 CFM 3 Make-Up Air Unit between 5,000 and 25,000 CFM 4 greater than 25,000 CFM 5 Iess than 25 HP 2 between 25 -150 HP* 3 greater than 150 HP* 4 Return Fan Iess than 20 HP 2			-
Seed to the property of the	Fuel Fired Boiler		
Less than 100 MBH 2 2 2 2 2 2 2 2 2			
Furnace between 100 and 500 MBH 3 greater than 500 MBH 4 Generator less than 500 KW 2 greater than 500 KW 3 LED 2 Fluorescent 3 HID/Incandescent 4 LED 2 Fluorescent 4 HID/Incandescent 5 less than 5,000 CFM 3 Make-Up Air Unit between 5,000 and 25,000 CFM greater than 25,000 CFM 5 Pumps less than 25 HP between 25 -150 HP* 2 greater than 150 HP* 4 Return Fan less than 20 HP 2			
Separator Sepa	_		
less than 500 KW	Furnace		
Generator greater than 500 KW 3 LED 2 Fluorescent 3 HID/Incandescent 4 Lighting, Interior LED 2 Fluorescent 4 HID/Incandescent 5 less than 5,000 CFM 3 between 5,000 and 25,000 CFM 4 greater than 25,000 CFM 5 less than 25 HP 2 between 25 -150 HP* 3 greater than 150 HP* 4 Return Fan less than 20 HP 2		0	
Lighting, Exterior LED 2 Fluorescent 3 HID/Incandescent 4 Lighting, Interior Fluorescent 4 HID/Incandescent 5 less than 5,000 CFM 3 between 5,000 and 25,000 CFM 4 greater than 25,000 CFM 5 Pumps less than 25 HP 2 between 25 -150 HP* 3 greater than 150 HP* 4 Return Fan less than 20 HP 2	Generator		
Lighting, Exterior Fluorescent 3 HID/Incandescent 4 Lighting, Interior Fluorescent 4 HID/Incandescent 5 Iess than 5,000 CFM 3 between 5,000 and 25,000 CFM 4 greater than 25,000 CFM 5 Iess than 25 HP 2 between 25 -150 HP* 3 greater than 150 HP* 4 Return Fan Iess than 20 HP 2			
HID/Incandescent 4			
Lighting, Interior LED 2 Fluorescent 4 HID/Incandescent 5 less than 5,000 CFM 3 between 5,000 and 25,000 CFM 4 greater than 25,000 CFM 5 less than 25 HP 2 between 25 -150 HP* 3 greater than 150 HP* 4 Return Fan less than 20 HP 2	Lighting, Exterior		3
Lighting, Interior Fluorescent 4 HID/Incandescent 5 less than 5,000 CFM 3 between 5,000 and 25,000 CFM 4 greater than 25,000 CFM 5 less than 25 HP 2 between 25 -150 HP* 3 greater than 150 HP* 4 Return Fan less than 20 HP 2			
HID/Incandescent 5 less than 5,000 CFM 3 between 5,000 and 25,000 CFM 4 greater than 25,000 CFM 5 less than 25 HP 2 between 25 -150 HP* 3 greater than 150 HP* 4 Return Fan less than 20 HP 2			2
less than 5,000 CFM	Lighting, Interior		4
Make-Up Air Unit between 5,000 and 25,000 CFM 4 greater than 25,000 CFM 5 Pumps less than 25 HP 2 between 25 -150 HP* 3 greater than 150 HP* 4 Return Fan less than 20 HP 2			5
greater than 25,000 CFM 5 less than 25 HP 2 between 25 -150 HP* 3 greater than 150 HP* 4 Return Fan less than 20 HP 2		·	3
less than 25 HP	Make-Up Air Unit	between 5,000 and 25,000 CFM	4
Pumps between 25 -150 HP* 3 greater than 150 HP* 4 Return Fan less than 20 HP 2			5
greater than 150 HP* 4 Return Fan less than 20 HP 2		less than 25 HP	2
Return Fan less than 20 HP 2	Pumps	between 25 -150 HP*	3
		greater than 150 HP*	4
Supply Fan greater than 20 HP* 3	Return Fan	less than 20 HP	2
	Supply Fan	greater than 20 HP*	3

ASSET TYPE	ASSET SIZE	ENERGY COST IMPACT (1-5)
	less than 5 ton	2
Rooftop Unit	between 5 and 20 tons	3
Koortop omt	between 20 and 50 tons	4
	greater than 50 tons	5
Transformer	greater than 200 kVA	2
VFD	greater than 50 HP	2
Air Compressor		
Air Curtain		
Air Dryer		
Cabinet Unit Heater		
Dehumidifier		
Electric Duct Heater	All sizes	2
Humidifier		
Unit Heater		
Unit Ventilator		
Walk-In Condenser		
Walk-In Unit		
All Other	All sizes	1

*Add 1 for direct drive motors

Operational Impact

Operational Impact scores are presented for each asset on a scale of 1-5 (low to high impact). This metric considers the operational impact caused if the equipment were to fail. Assets serving critical administrative and district operational spaces are assigned scores of 2-5 depending on the impact the failure of an asset would have and if backups are available. An operational impact score of 1 indicates that there is little to no impact to administrative or operational activities.

SCORE	OPERATIONAL COST IMPACT SCORE			
1	Asset has little to no operational impact.			
2	2 Asset has a low level of operational impact.			
3	Asset has a moderate operational impact.			
4	Asset has a high level of operational impact.			
5	Asset has severe operational impact.			

Industry Life Expectancy

The designed life expectancy for a given asset is determined using a combination of widely accepted industry standards including ASHRAE and BOMA, as well as a manufacturers' database of equipment life expectancies. This value is expressed in number of years.

Observed Remaining Life

The Observed Remaining Life is also expressed in number of years and takes into consideration the function and operating environment of the asset, as well as a determination based upon a visual inspection of the asset. The Observed Remaining Life value may vary from the Design Life value. For example, a secondary heat exchanger that has been well maintained may have an Observed Remaining Life that is greater than the expected Design Life. Likewise, a primary chilled water pump that has not been well maintained, and shows visual signs of premature wear and tear, may have an Observed Remaining Life that is less than the expected Design Life.

Cost Estimating

Based on the constraints of the scope outlined in the contract we have based our asset pricing upon industry standards, RSMeans, and pricing data sourced through McKinstry's construction division. This information is intended to assist in the prioritization and resource allocation associated with maintenance and capital replacement projects. Cost estimates are determined using specific characteristics of each asset (tonnage, motor size, capacity, etc.) along with one of several cost information data sets. Standard equipment warranties are included.

To clarify, all Estimated Replacement Costs include averages of the material cost of the asset, the demolition and installation of that asset type and are expressed in 2023 dollars. Additionally, site specific construction and equipment invoices have been utilized as available.

Costs associated with project design, contractor competence, commissioning, test and balance services and are excluded from the estimate and are the responsibility of the Client. McKinstry assumed a 3% inflation, applied year over year. All work is during normal business hours. For mechanical equipment any duct work, piping, existing appurtenances are to be reused; costs to repair or replace any lines going to or coming from the units is excluded. Existing isolation valves to be used; repair or replacement of isolation valves is excluded.

Costs typically associated with project-specific parameters are excluded and should be added at the discretion of the Client. Such exclusions include risks or contingencies such as asbestos abatement, other hazardous waste abatement, scope changes, design changes, taxes, special wage requirements such as Prevailing Wage rates, warranty management and unknown site conditions. Overtime and after-hours work is excluded. Any necessary structural or electrical upgrades to replace equipment is excluded. Incidental code violations resulting from project scope or execution are excluded. Correction of any existing code violations are excluded. Temporary heating, cooling, ventilation, and power during construction and the warranty period are excluded. Moving of heavy equipment or furniture to complete the work is excluded. Running and terminating new IP drops for equipment is excluded. Any changes to fire and life safety systems for mechanical equipment upgrades is excluded.

Data-Driven Maintenance Approach

Included with the submission of this report is the FCA Data Collection Workbook, which includes all data collected for each asset. The Workbook can be used to quickly sort through equipment and prioritize maintenance and replacement efforts. Additional observations and equipment details are provided within the workbook for each asset.

Each asset is classified according to building system, size, capacity, and other standards, as well as ratings of current condition and impact of failure. Such organization and classification facilitate searching and sorting the data for maintenance and replacement priorities. As mentioned, the impact ratings help to compare one asset to another. Based on observed condition and impact scores, the future maintenance priorities for each building are described further in later sections.

As each of the components identified in the workbook is repaired or replaced, the information can be revised to reflect the new conditions. Remaining useful life values can also be manually iterated one year from the assessment date to reflect fewer remaining years of life. Assets no longer in service can be removed from the list. Similarly, assets that have been newly installed can be added to the list. Following the impact guidelines, relative priority can be calculated for these assets.

Equity Index

As an additional metric to the six existing areas of the Facilities Condition Assessment, Poudre School District has created an Equity Index to assist in prioritizing facilities improvement projects. This number takes into account student poverty, students qualifying for ELA services, students qualifying for Special Education services, and students who are homeless. The calculated score for each school is based on these factors and where it falls in relation to the district average. The formula would be:

School Percentage in these areas added together as decimals

District Percentages in these areas added together as decimals

In this formula, a school with student needs equal to the district average would have an equity index of 1.0. Schools with student needs higher than the district average would have an Equity Index greater than 1.0. Schools with student needs less than the district average would have an Equity Index less than 1.0.

Category	Equity Index
Low	0.29
High	3.20
Average	1.11
Median	0.95

The equity index for Wellington Middle/High School is 1.04.

Sample Calculation:

	School					Total of	Equity Index Number =
School	Population				McKinney-	Previous	school average / district
Name	K-12 Total	F/R	ELL	SPED	Vento	Columns	average
Sample	381	15.20%	0.00%	8.40%	0.00%	0.24	0.24/0.48 = 0.49
Grand PSD							
Total - Oct							
2022							
Count	26,163	29.5%	5.8%	9.5%	3.4%	0.48	

F/R - Free or Reduced-Price Lunch; ELL- English Language Learners; SPED - Special Ed.; McKinnney-Vento - Homeless Assistance

Section 3

Condition Assessment





SYSTEMS DESCRIPTION

This section summarizes the building systems at Wellington Middle/High School and describes the general condition observed based on the assessment. Specific findings and recommendations are detailed later in this report.

Exterior Enclosure

Exterior walls consist of brick wall, pre-cast concrete walls with metal clapboard. The building has many aluminum-framed windows and translucent panels. Exterior doors consist of a combination of metal and glass storefront doors, in addition to a few coiling doors. Generally, exterior enclosure elements are in good condition given the recent construction of the building.

Roofing

The building's roofing consists of an EPDM membrane and metal flashing which was installed circa 2022. The roofing is in good condition. In addition, the building has skylights which are also in good condition.

Interior Construction and Finishes

The interior construction consists of CMU block wall, drywall, window walls, wood doors, storefront doors, acoustic tile and drywall ceiling, carpet, ceramic tile flooring, VCT flooring, athletic flooring, and exposed concrete flooring. Generally, the interior construction is in good condition.

Conveyance

The school has one elevator, serving two floors, in good condition.

Electrical and Lighting

The building's electrical distribution equipment consists of a combination of 120/208V and 277/480V panels, transformers, and switchgear. Generally, these assets are in good condition. The fire alarm system dates to the original construction of the building. Interior lighting consists of LED fixtures. Exterior lighting is in good condition.

HVAC Systems

The building's heating, ventilation, and air conditioning (HVAC) system consists of a ground-source heat pump system and a hot water system. The school has 18 rooftop units. The building automation system is made up of Distech Controls utilizing BACnet IP and BACnet MS/TP communications. The ground source system manifolds are located in confined spaces under the parking lot. Additional HVAC equipment includes makeup air units, fan coil units, exhaust fans, radiant heaters, unit heaters, and cabinet unit heaters. Overall, the HVAC system is in good condition.

Plumbing

Domestic hot water is provided by four (4) natural gas fired water heater installed in 2022. One of the water heaters (WH-4) was leaking.

Additional plumbing equipment includes backflow preventers, expansion tanks, and pumps. Overall, the plumbing system is in good condition.

Fire Suppression

Fire protection consists of a wet type fire sprinkler system installed in 2022.

Equipment

There is one (1) walk-in cooler and one (1) walk-in freezer in the school's kitchen. These units generally appear to be in good condition.

PRIORITIES

SPECIFIC PRIORITIES

The top capital measures (up to five max) have been detailed in the following tables. Each measure receives a priority level of 1, 2, or 3. A priority level of 1 indicates that the measure is considered an immediate concern or a potential hazard and should be addressed as soon as possible. A priority level of 2 indicates that the measure is considered urgent, but not a potential hazard or there is a less severe impact to occupants. A priority level of 3 indicates that the assets associated with the measure are nearing end of life, but have not yet failed or have a mild to moderate impact on occupant safety and comfort.

Wellington Middle/High School


Replace Fire Pump 1

Although Wellington Middle/High School is a recently constructed building, fire pump 1 is secommended that this pump be replaced within two years.



The following assets are included within this measure:

FCAID-610403



Priority Level: 1
Estimated Cost: \$24,640
Remaining Life: 2 Years

Replace WH-4

Although Wellington Middle/High School is a recently constructed building, WH-4 was identified to have a leak this water heater be replaced within two years.



The following assets are included within this measure:

FCAID-610082

Priority Level: 2
Estimated Cost: \$30,160
Remaining Life: 2 Years

Ground Source System

A heat exchanger was excluded from the ground source system design,

This represents a future maintenance issue, possible life expectancy.

This represents a future maintenance issue, possible life expectancy decrease of heat pumps, and a decrease in the heat transfer differential of the heat pumps.

The following assets are included within this measure:

N/A

Priority Level: 2
Estimated Cost: N/A
Remaining Life: N/A

Water Softeners

The water softeners have been taken offline due to Unsafe levels of copper have been detected in the DCWS. To ensure longevity of the school's domestic water systems, we recommend that an entirely new comprehensive water treatment system be installed that can treat domestic cold water for metals and other contaminants.



The following assets are included within this measure:

FCAID-610083, FCAID-610084

Priority Level: 2
Estimated Cost: TBD
Remaining Life: N/A

Stabilizing Ladder on Roof

The ladder on the roof accessing the locker room area roof from the gym area roof, was not fully secured. This ladder should be properly secured and stabilized as soon as possible.

The following assets are included within this measure:


FCAID-610018

Priority Level: 1
Estimated Cost: \$0
Remaining Life: 1 Year

3-, 5-, 10-YEAR PLANS

The following sections present the expected equipment replacement costs over the next ten years, broken into three separate plans. These plans are the 3-Year Plan, 5-Year Plan, and the 10-Year Plan. Each plan includes the equipment expected to fail during these periods, based on the observed condition of the equipment at the time of the assessment. Note, the 3-Year Plan includes assets failing within the next three years, the 5-Year Plan includes assets failing between four and five years, and the 10-Year Plan includes assets failing between in the next six to ten years from the assessment date.

The chart below presents the total expected replacement costs for each plan. Note that these figures include 3% inflation YOY.

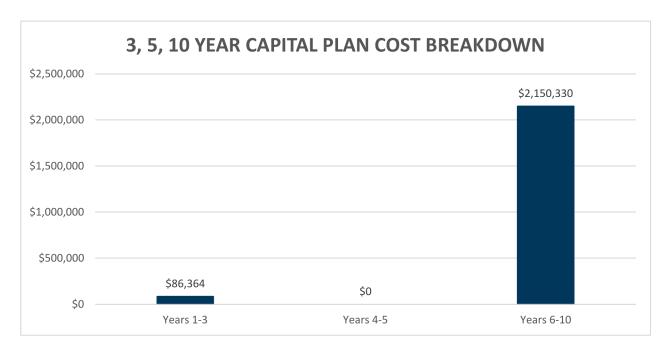

Future Capital Plan


The table below displays replacement costs for the campus, and the number of associated assets expected to fail within the next ten years. Assets requiring replacement or extensive maintenance in this plan are presented in Appendices A, B, and C.

REPLACEMENT PERIOD	ASSET QUANTITY	CUMULATIVE REPLACEMENT COST
3-Year Plan	4	\$86,364
5-Year Plan	0	\$0
10-Year Plan	13	\$2,150,330
Total	17	\$2,236,694

3-YEAR PLAN BREAKDOWN

The three-year plan includes the estimated capital expenditure needed to replace assets reaching end of life in years 1-3, or between 2024 and 2026. The sum of the anticipated capital needs is \$86,364. The specific assets that will reach end of life in this period are listed in Appendix A.

SUBSYSTEM	Years 1-3	Percent
A10 - Foundations	\$0	0%
B10 - Superstructure	\$0	0%
B20 - Exterior Enclosure	\$0	0%
B30 - Roofing	\$0	0%
C10 - Int. Construction	\$0	0%
C20 - Stairs	\$0	0%
C30 - Interior Finishes	\$0	0%
D10 - Conveying	\$0	0%
D20 - Plumbing	\$60,985	71%
D30 - HVAC	\$0	0%
D40 - Fire Protection	\$25,379	29%
D50 - Electrical	\$0	0%
E10 - Equipment	\$0	0%
G20 - Site Improvements	\$0	0%
G40 - Site Electrical	\$0	0%

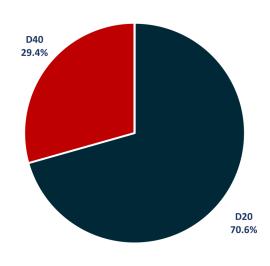

5-YEAR PLAN BREAKDOWN


The five-year plan includes the estimated capital expenditure needed to replace assets reaching end of life in years 4-5, or between 2027 and 2028. The sum of the anticipated capital needs is \$0. The specific assets that will reach end of life in this period are listed in Appendix A.

SUBSYSTEM	Years 4-5	Percent
A10 - Foundations	\$0	N/A
B10 - Superstructure	\$0	N/A
B20 - Exterior Enclosure	\$0	N/A
B30 - Roofing	\$0	N/A
C10 - Int. Construction	\$0	N/A
C20 - Stairs	\$0	N/A
C30 - Interior Finishes	\$0	N/A
D10 - Conveying	\$0	N/A
D20 - Plumbing	\$0	N/A
D30 - HVAC	\$0	N/A
D40 - Fire Protection	\$0	N/A
D50 - Electrical	\$0	N/A
E10 - Equipment	\$0	N/A
G20 - Site Improvements	\$0	N/A
G40 - Site Electrical	\$0	N/A

10-YEAR PLAN BREAKDOWN

The ten-year plan includes the estimated capital expenditure needed to replace assets reaching end of life in years 6-10, or between 2029 and 2033. The sum of the anticipated capital needs is \$2,150,330. The specific assets that will reach end of life in this period are listed in Appendix A.

SUBSYSTEM	Years 6-10	Percent
A10 - Foundations	\$0	0%
B10 - Superstructure	\$0	0%
B20 - Exterior Enclosure	\$0	0%
B30 - Roofing	\$0	0%
C10 - Int. Construction	\$0	0%
C20 - Stairs	\$0	0%
C30 - Interior Finishes	\$796,241	37%
D10 - Conveying	\$0	0%
D20 - Plumbing	\$114,617	5%
D30 - HVAC	\$25,437	1%
D40 - Fire Protection	\$0	0%
D50 - Electrical	\$1,214,034	56%
E10 - Equipment	\$0	0%
G20 - Site Improvements	\$0	0%
G40 - Site Electrical	\$0	0%

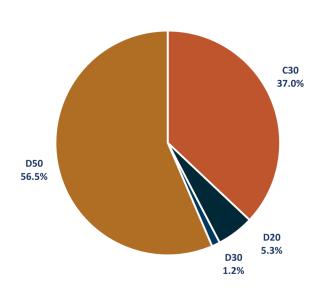

PRIORITY SUMMARY

The summary below assigns a composite Overall Priority Score to the campus as of the assessment date. Priority Scores range from 6 (low priority) to 30 (high priority), and are based on asset condition, operating impact, student impact, energy impact, estimated replacement cost, and observed remaining life.


In addition to the Overall Priority Score, each Subsystem category within the site is assigned a Priority Score. This score can differentiate systems that may need more attention than others, due to condition or impact on occupants or operations. Each Subsystem category includes a general narrative section under the Description column.

Future Capital Plan

The Subsystem scores are color coded to reflect the level of priority: ≤12 = Green, 12.1-23.9 = Yellow, ≥24 = Red. Higher priority scores indicate that a system should be considered for maintenance or capital improvements before other systems with lower scores. The rating scale for Priority Score is visualized below.

LOW	MEDIUM-LOW	MEDIUM	MEDIUM-HIGH	HIGH
6	12	18	24	30

PRIORITY SCORE SUMMARY - WELLINGTON MIDDLE/HIGH SCHOOL

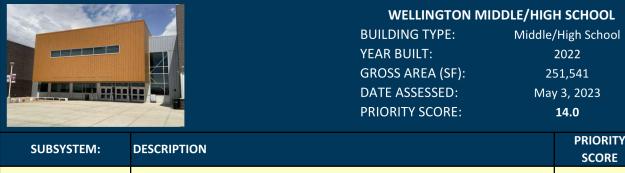

SUBSYSTEM:	DESCRIPTION	PRIORITY SCORE
B20 - Ext. Enclosure	Exterior walls consist of brick wall, pre-cast concrete walls with metal clapboard. The building has many aluminum-framed windows and translucent panels. Exterior doors consist of a combination of metal and glass storefront doors, in addition to a few coiling doors. Generally, exterior enclosure elements are in good condition given the recent construction of the building.	12.5
B30 - Roofing	The building's roofing consists of an EPDM membrane and metal flashing which was installed circa 2022. The roofing is in good condition. In addition, the building has skylights which are also in good condition.	14.0
C10 - Int. Construction	The interior construction consists of CMU block wall, drywall, window walls, wood doors, storefront doors, acoustic tile and drywall ceiling, carpet, ceramic tile flooring, VCT flooring,	12.3
C30 - Interior Finishes	athletic flooring, and exposed concrete flooring. Generally, the interior construction is in good condition.	12.4
D20 - Plumbing	Domestic hot water is provided by four (4) natural gas fired water heater installed in 2022. One of the water heaters (WH-4) was leaking. Additional plumbing equipment includes backflow preventers, expansion tanks, and pumps. Overall, the plumbing system is in good condition.	14.0
D30 - HVAC	The building's heating, ventilation, and air conditioning (HVAC) system consists of a ground-source heat pump system and a hot water system. The school has 18 rooftop units. The building automation system is made up of Distech Controls utilizing BACnet IP and BACnet MS/TP communications. The ground source system manifolds are located in confined spaces under the parking lot. Additional HVAC equipment includes makeup air units, fan coil units, exhaust fans, radiant heaters, unit heaters, and cabinet unit heaters. Overall, the HVAC system is in good condition.	13.0
D40 - Fire Suppression	Fire protection consists of a wet type fire sprinkler system installed in 2022.	19.0
D50 - Electrical	The building's electrical distribution equipment consists of a combination of 120/208V and 277/480V panels, transformers, and switchgear. Generally, these assets are in good condition. The fire alarm system dates to the original construction of the building. Interior lighting consists of LED fixtures. Exterior lighting is in good condition.	17.8
E10 - Equipment	There is one (1) walk-in cooler and one (1) walk-in freezer in the school's kitchen. These units generally appear to be in good condition.	12.0

System priority scored from 6 (lowest priority) to 30 (highest priority) based on condition, operating impact, student/teacher impact, energy impact, estimated replacement cost, and observed remaining life. [\leq 12 = green, 12-24 = yellow, \geq 24 = red]

Appendices

A. 3-YEAR PLAN ASSETS LIST B. 5-YEAR PLAN ASSETS LIST C.10-YEAR PLAN ASSETS LIST

Appendix A

APPENDIX A: 3-YEAR PLAN ASSETS LIST

The individual assets associated with the 3-Year Plan are shown below, sorted from highest to lowest priority score. The priority score key is shown below for convenience.

Note that these values represent current replacement costs expressed in 2023 dollar amounts and are not adjusted for inflation.

LOW	MEDIUM-LOW	MEDIUM	MEDIUM-HIGH	HIGH
6	12	18	24	30

The asset ID listed for each entry has been assigned during this assessment and reflects the corresponding asset in the FCA workbook.

WELLINGTON MIDDLE/HIGH SCHOOL

ASSET ID	DESCRIPTION	SUBSYSTEM	OBSERVED Remaining	REPLACEMENT Cost	PRIORITY Score
FCAID-610403	Fire Pump-1	D40 - Fire Prot.	2	\$24,640	17
FCAID-610082	GWH-4	D20 - Plumbing	2	\$30,160	17
FCAID-610084	Water Softener-2	D20 - Plumbing	1	\$14,960	15
FCAID-610083	Water Softener-1	D20 - Plumbing	1	\$14,960	15

Appendix B

APPENDIX B: 5-YEAR PLAN ASSETS LIST

The individual assets associated with the 5-Year Plan are shown below, sorted from highest to lowest priority score. The priority score key is shown below for convenience.

Note that these values represent current replacement costs expressed in 2023 dollar amounts and are not adjusted for inflation.

LOW	MEDIUM-LOW	MEDIUM	MEDIUM-HIGH	HIGH
6	12	18	24	30

The asset ID listed for each entry has been assigned during this assessment and reflects the corresponding asset in the FCA workbook.

WELLINGTON MIDDLE/HIGH SCHOOL

ASSET ID	DESCRIPTION	SUBSYSTEM	OBSERVED Remaining Life	REPLACEMENT Cost	PRIORITY Score	
----------	-------------	-----------	-------------------------------	---------------------	-------------------	--

Appendix C

APPENDIX C: 10-YEAR PLAN ASSETS LIST

The individual assets associated with the 10-Year Plan are shown below, sorted from highest to lowest priority score. The priority score key is shown below for convenience.

Note that these values represent current replacement costs expressed in 2023 dollar amounts and are not adjusted for inflation.

LOW	MEDIUM-LOW	MEDIUM	MEDIUM-HIGH	HIGH
6	12	18	24	30

The asset ID listed for each entry has been assigned during this assessment and reflects the corresponding asset in the FCA workbook.

WELLINGTON MIDDLE/HIGH SCHOOL

ASSET ID	DESCRIPTION	SUBSYSTEM	OBSERVED Remaining Life	REPLACEMENT COST	PRIORITY Score
FCAID-610414	Emergency Back-Up Lighting	D50 - Electrical	9	\$958,370	20
FCAID-610040	Interior Flooring Finishes: Carpet	C30 - Int. Finishes	9	\$628,560	14
FCAID-610081	GWH-3	D20 - Plumbing	9	\$30,160	12
FCAID-610080	GWH-2	D20 - Plumbing	9	\$30,160	12
FCAID-610079	GWH-1	D20 - Plumbing	9	\$30,160	12
FCAID-610399	EUH-5	D30 - HVAC	9	\$2,510	10
FCAID-610401	EUH-7	D30 - HVAC	9	\$2,510	10
FCAID-610400	EUH-6	D30 - HVAC	9	\$2,510	10
FCAID-610395	EUH-1	D30 - HVAC	9	\$2,510	10
FCAID-610398	EUH-4	D30 - HVAC	9	\$2,510	10
FCAID-610402	EUH-8	D30 - HVAC	9	\$2,510	10
FCAID-610396	EUH-2	D30 - HVAC	9	\$2,510	10
FCAID-610397	EUH-3	D30 - HVAC	9	\$2,510	10